



## Mountable accessories (to be ordered separately):

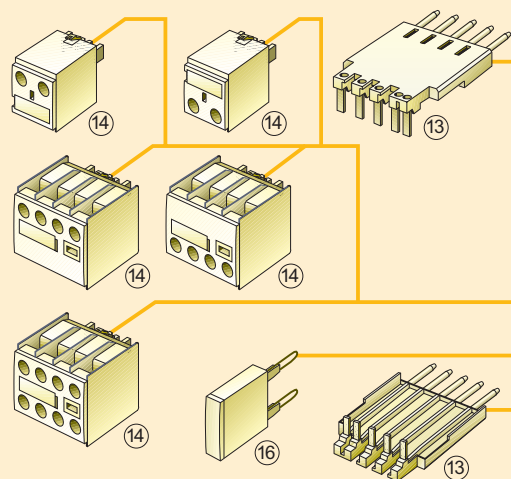

## The fully wired and tested contactor assembly includes the following components:


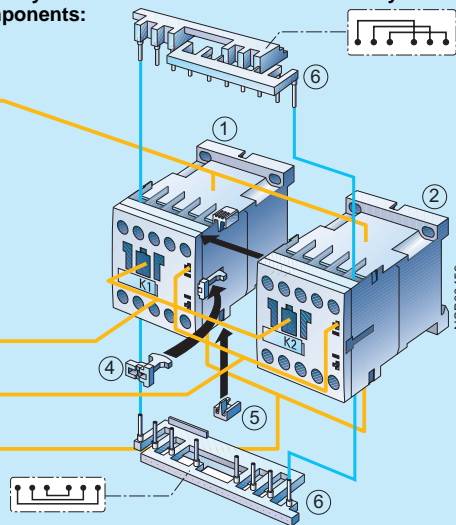


Accessories	Order No.	Page	Individual parts	Order No. K1	K2	Page
13 Solder pin adapters	3RT19 16-4KA1	3/107	1 2 Contactors, 3 kW	3RT10 15	3RT10 15	3/15
14 Auxiliary switch block, front (auxiliary switch block according to EN 50005 must be used)	3RH19 11-1....	3/97	1 2 Contactors, 4 kW	3RT10 16	3RT10 16	3/15
			1 2 Contactors, 5.5 kW	3RT10 17	3RT10 17	3/15
16 Surge suppressors	3RT19 16-1....	3/104, 3/105	4 5 6 Installation kit	3RA19 13-2A		3/38
The installation kit contains:						
4 Mechanical interlock						
5 2 connecting clips for 2 contactors						
6 Wiring modules on the top and bottom for connecting the main current paths, electrical interlock included <sup>1)</sup> , interruptible (NC contact interlock)						

<sup>1)</sup> 3RT10 1. contactors with one NC contact in the basic unit are required for the electrical interlock.

**Mountable accessories (to be ordered separately):**


The fully wired and tested contactor assembly includes the following components:

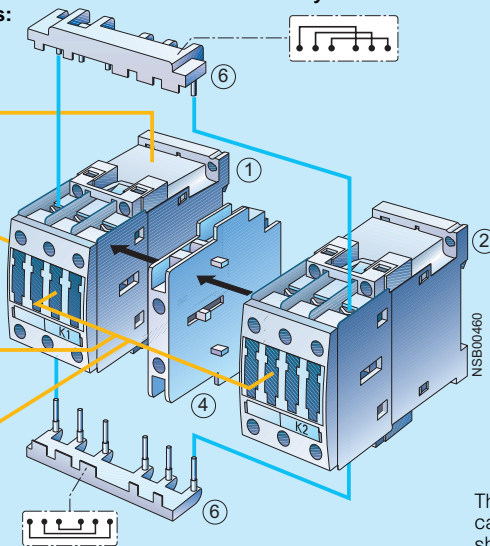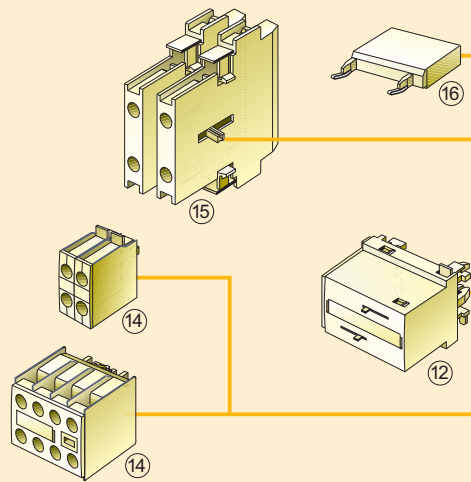


The connecting cables are not shown.

Accessories		Order No.	Page	Individual parts		Order No. K1	K2	Page
⑫	Mechanical interlock, front	3RA19 24-1A	3/37	①②	Contactors, 5,5 kW	3RT10 24	3RT10 24	3/16
⑭	Auxiliary switch block, front	3RH19 21-1CA..	3/98	①②	Contactors, 7,5 kW	3RT10 25	3RT10 25	3/16
				①②	Contactors, 11 kW	3RT10 26	3RT10 26	3/16
⑮	Auxiliary switch block, lateral	3RH19 21-1EA..	3/100	④	Mechanical interlock, lateral	3RA19 24-2B		3/37
⑯	Surge suppressors	3RT19 26-1....	3/104	⑥	Installation kit	3RA19 23-2A		3/38
						The installation kit contains wiring modules on the top and bottom (they also form the mechanical connection between the contactors).		

**Mountable accessories (to be ordered separately):**

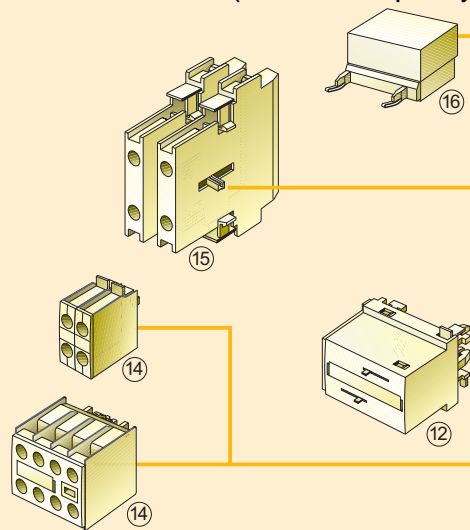


The fully wired and tested contactor assembly includes the following components:

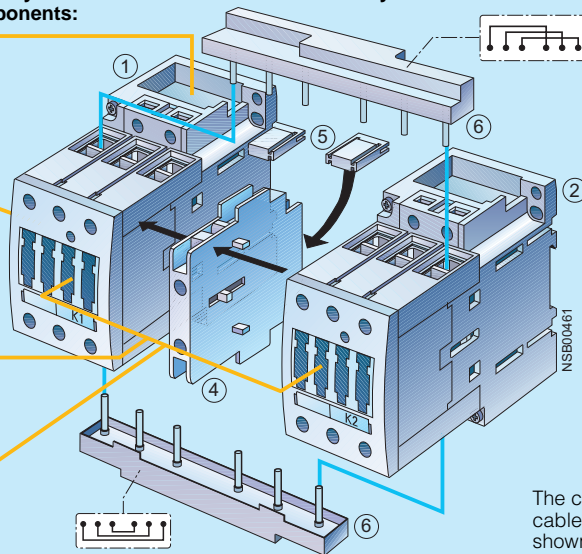


The connecting cables are not shown.

Accessories		Order No.	Page	Individual parts		Order No.		Page
						K1	K2	
12	Mechanical interlock, front	3RA19 24-1A	3/37	1 2	Contactors, 15 kW	3RT10 34	3RT10 34	3/17
				1 2	Contactors, 18.5 kW	3RT10 35	3RT10 35	3/17
14	Auxiliary switch block, front	3RH19 21-1CA..	3/98	1 2	Contactors, 22 kW	3RT10 36	3RT10 36	3/17
15	Auxiliary switch block, lateral	3RH19 21-1EA..	3/100	4	Mechanical interlock, lateral	3RA19 24-2B		3/37
16	Surge suppressors	3RT19 26-1.... 3RT19 36-1....	3/104	5 6	Installation kit	3RA19 33-2A		3/38
				The installation kit contains:				
				5	2 connecting clips for 2 contactors with a clearance of 10 mm			
				6	Wiring modules on the top and bottom for connecting the main current paths			

## Mountable accessories (to be ordered separately):

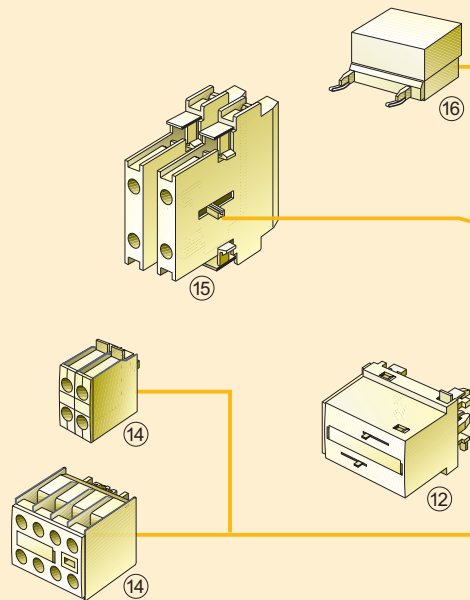

## The fully wired and tested contactor assembly includes the following components:

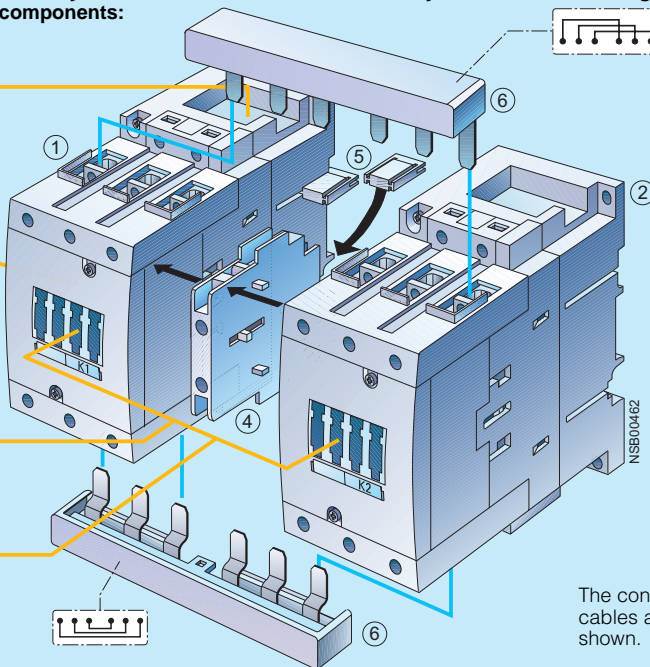

### Accessories

### Order No.

### Page

### Individual parts

### Order No.

#### K1

#### K2

### Page

12	Mechanical interlock, front	3RA19 24-1A	3/37	1 2	Contactors, 30 kW	3RT10 44	3RT10 44	3/18
14	Auxiliary switch block, front	3RH19 21-1CA..	3/98	1 2	Contactors, 37 kW	3RT10 45	3RT10 45	3/18
15	Auxiliary switch block, lateral	3RH19 21-1EA..	3/100	1 2	Contactors, 45 kW	3RT10 46	3RT10 46	3/18
16	Surge suppressors	3RT19 26-1.... 3RT19 36-1....	3/104	4	Mechanical interlock, lateral	3RA19 24-2B		3/37
				5 6	Installation kit	3RA19 43-2A		3/38
The installation kit contains:								
				5	2 connecting clips for 2 contactors with a clearance of 10 mm			
				6	Wiring modules on the top and bottom for connecting the main current paths			