


ALPHA 8HP Molded-Plastic Distribution System

Single Enclosures

Enclosures with DIAZED/NEOZED screw-in fuse links, 25 A and 63 A

Overview

- Complete enclosures with connection-ready assembly kits with DIAZED and NEOZED bases including cover plates.
- PE and N outgoing feeders: one rail-mounting terminal each on copper bar, 6 x 6 mm, for each 3-pole circuit
25 A/4 mm² (8WA2 860),
63 A/16 mm² (8WA2 861).
- The bars can be equipped with further terminals, [see accessories, page 7/30 ff.](#)
- Transparent cover with quick-acting locks for opening with tool.
- For fuse links, [please refer to Catalog ET B1.](#)

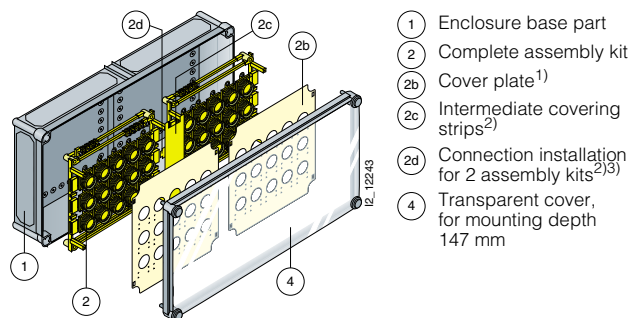

Enclosure size	Size and number of DIAZED/NEOZED fuse links	Incoming cable, single or multi-core Main conductor/PE/N mm ²	Complete enclosure (Delivery in individual components)	Individual components		
			Type	Image	Type	
DIAZED fuse enclosures						
1	2 × 3 × 25 A (E27)	3 × 16/1 × 16/1 × 16	8HP2 122	1 2 4	8HP1 101 8HP5 142 8HP1 221	
	2 × 3 × 63 A (E33)	3 × 16/1 × 16/1 × 16	8HP2 131	1 2 4	8HP1 101 8HP5 162 8HP1 221	
2	4 × 3 × 25 A (E27)	3 × 35/1 × 16/1 × 16	8HP2 124	1 2 4	8HP1 102 8HP5 144 8HP1 222	
	5 × 3 × 25 A (E27)	3 × 35/1 × 35/1 × 35	8HP2 125	1 2 4	8HP1 102 8HP5 145 8HP1 222	
	4 × 3 × 63 A (E33)	3 × 35/1 × 35/1 × 35	8HP2 133	1 2 4	8HP1 102 8HP5 164 8HP1 222	
	2 × 3 × 25 A (E27) and 3 × 3 × 63 A (E33)	3 × 35/1 × 35/1 × 35	8HP2 145	1 2 4	8HP1 102 8HP5 170 8HP1 222	
2.5	7 × 3 × 25 A (E27)	3 × 35/1 × 35/1 × 35	8HP2 126	1 2 4	8HP1 107 8HP5 166 8HP1 227	
	6 × 3 × 63 A (E33)	3 × 35/1 × 35/1 × 35	8HP2 135	1 2 4	8HP1 107 8HP5 166 8HP1 227	
	5 × 3 × 25 A (E27) and 2 × 3 × 63 A (E33)	3 × 35+3 × 16/1 × 35/1 × 35	8HP2 152	1 2 4	8HP1 107 8HP5 172 8HP1 227	
	2 × 3 × 25 A (E27) and 4 × 3 × 63 A (E33)	3 × 35+3 × 16/1 × 35/1 × 35	8HP2 153	1 2 4	8HP1 107 8HP5 171 8HP1 227	
3	8 × 3 × 25 A (E27)	2 × 3 × 35/1 × 35/1 × 35	8HP2 128	1 2 4	8HP1 103 8HP5 148 8HP1 223	
	10 × 3 × 25 A (E27)	2 × 3 × 35/1 × 35/1 × 35	8HP2 130	1 2 4	8HP1 103 8HP5 150 8HP1 227	
	8 × 3 × 63 A (E33)	2 × 3 × 35/1 × 35/1 × 35	8HP2 137	1 2 4	8HP1 103 8HP5 167 8HP1 223	
	6 × 3 × 25 A (E27) and 4 × 3 × 63 A (E33)	2 × 3 × 35/1 × 35/1 × 35	8HP2 146	1 2 4	8HP1 103 8HP5 174 8HP1 223	
	7 × 3 × 25 A (E27) and 3 × 3 × 63 A (E33)	2 × 3 × 35/1 × 35/1 × 35	8HP2 147	1 2 4	8HP1 103 8HP5 175 8HP1 223	
	2 × 3 × 25 A (E27) and 8 × 3 × 63 A (E33)	3 × 70/1 × 35/1 × 35	8HP2 148	1 2 4	8HP1 103 8HP5 173 8HP1 223	
NEOZED fuse enclosures						
2	8 × 3 × 63 A (D02) Sleeve gauge pieces for current < 63 A see Catalog ET B1.	3 × 50/1 × 35/1 × 35	8HP2 157	1 2 4	8HP1 102 8HP5 157 8HP1 222	

1) Available in assembly kits of all sizes.

2) Available in assembly kits sizes 2.5 and 3.

3) Also as cross-connection to the next enclosure, [see page 7/38.](#)