

Semiconductor Fuses

LV HRC SITOR Fuse Links


Rated voltage 600 V AC

Characteristic curves


Series 3NE1 437-1, 3NE1 438-1

Size: 3
 Operational class: gR
 Rated voltage: 600 V AC
 Rated current: 710 ... 800 A


Time/current characteristics diagram

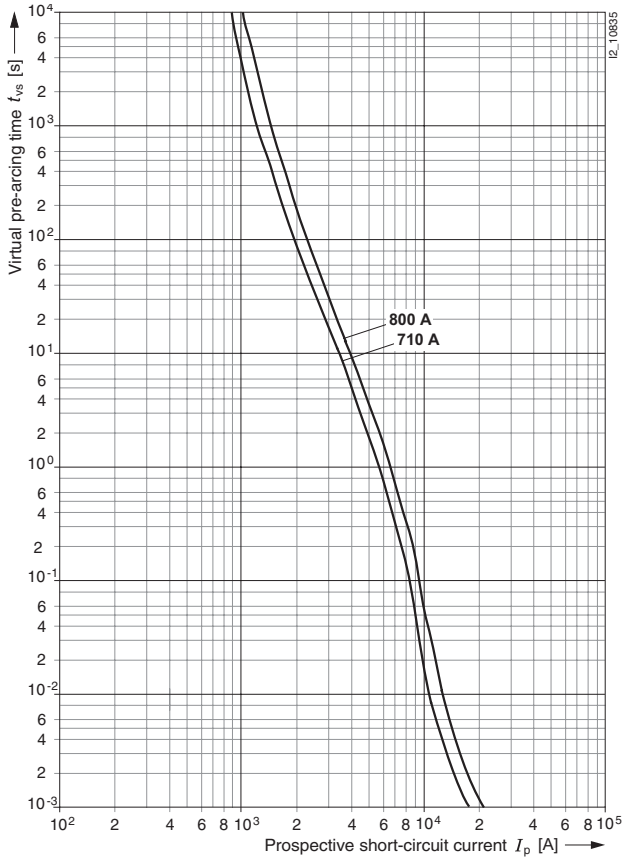

Let-through characteristics (current limitation at 50 Hz)

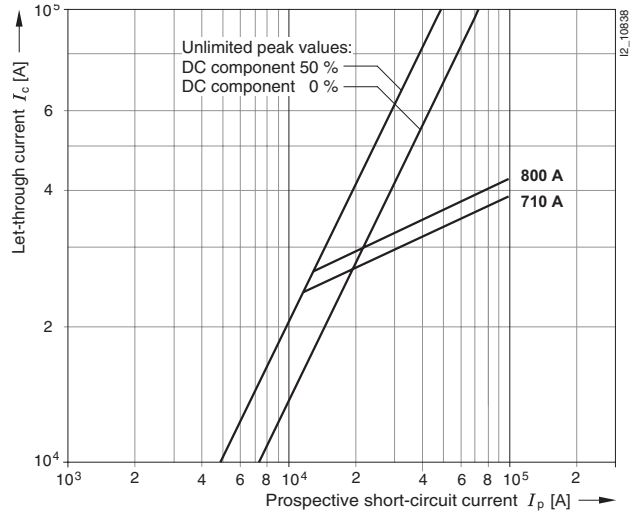

Correction factor k_A for breaking I^2t value

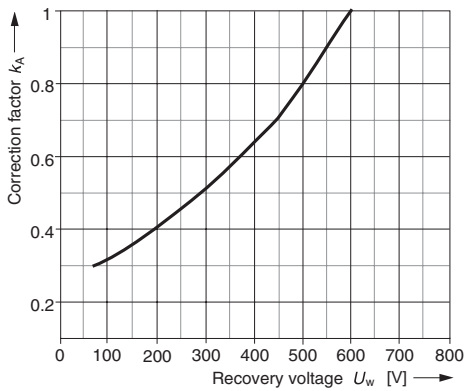

Peak arc voltage

