

Semiconductor Fuses

LV HRC SITOR Fuse Links


Rated voltage 690 V AC,
operational class gS

Characteristic curves


Series 3NE1 8...-0

Size: 000
Operational class: gS
Rated voltage: 690 V AC
Rated current: 16 ... 80 A


Time/current characteristics diagram

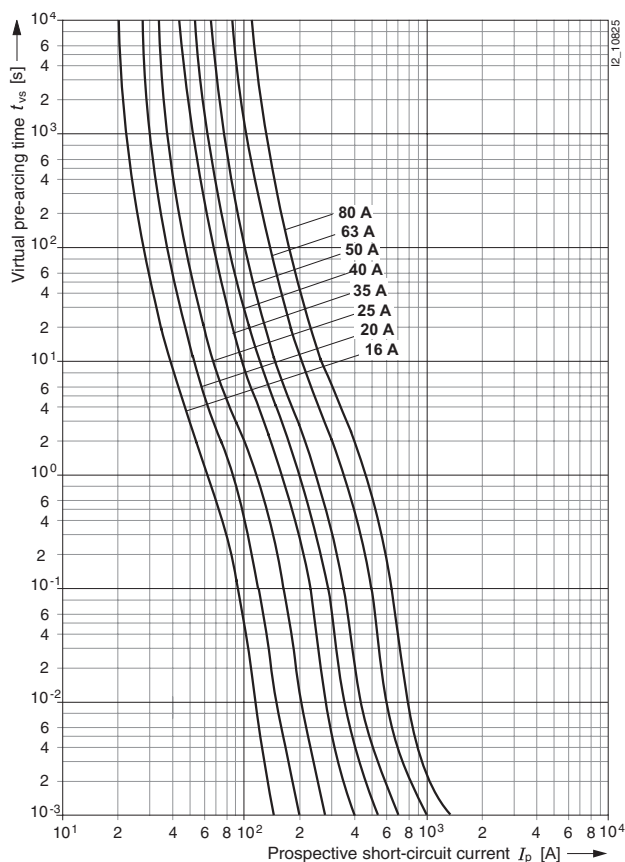

Let-through characteristics (current limitation at 50 Hz)

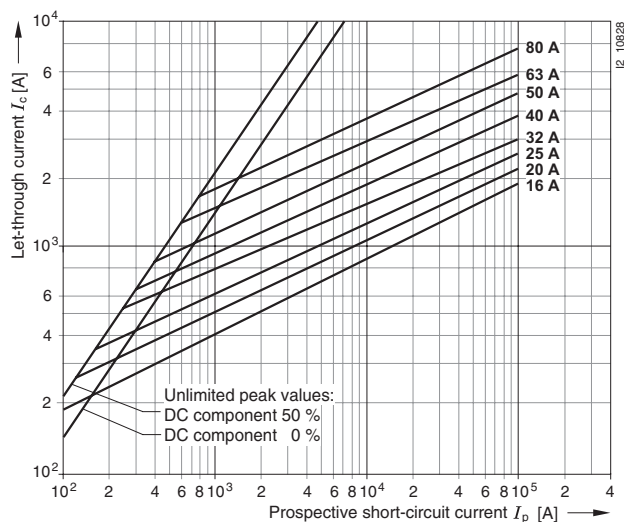

Correction factor k_A for breaking I^2t value

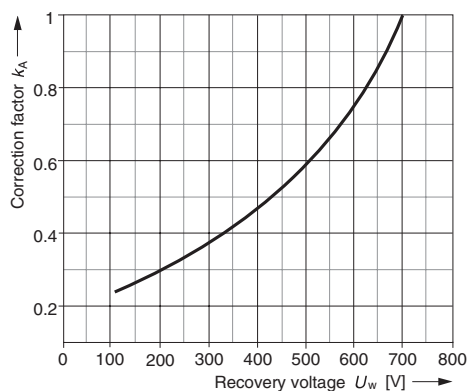

Peak arc voltage

