

Semiconductor Fuses

LV HRC SITOR Fuse Links


Rated voltage 690 V AC,
operational class gR

Characteristic curves


Series 3NE1 022-2, 3NE1 2...-2, 3NE1 33.-2

Size: 00, 1
Operational class: gR
Rated voltage: 690 V AC
Rated current: 125 ... 500 A


Time/current characteristics diagram

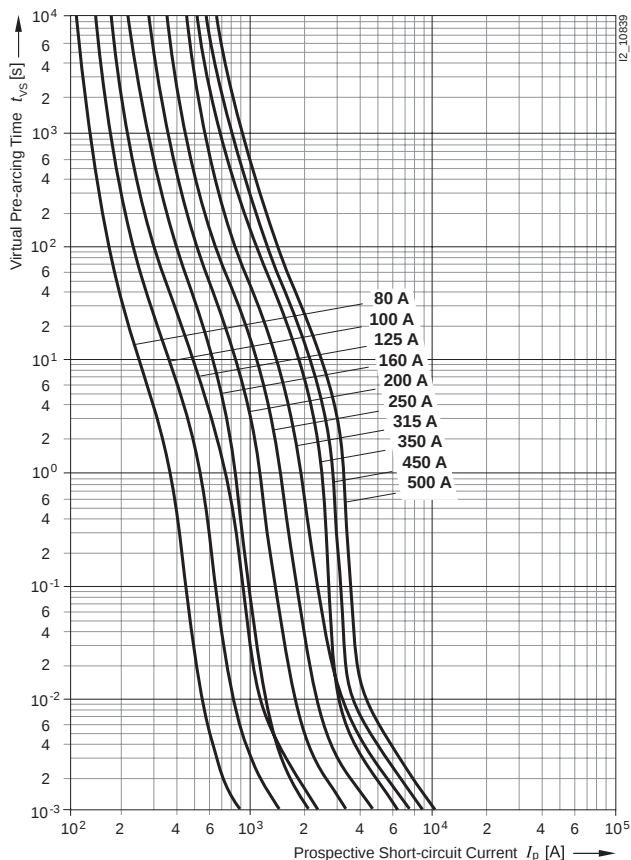

Let-through characteristics (current limitation at 50 Hz)

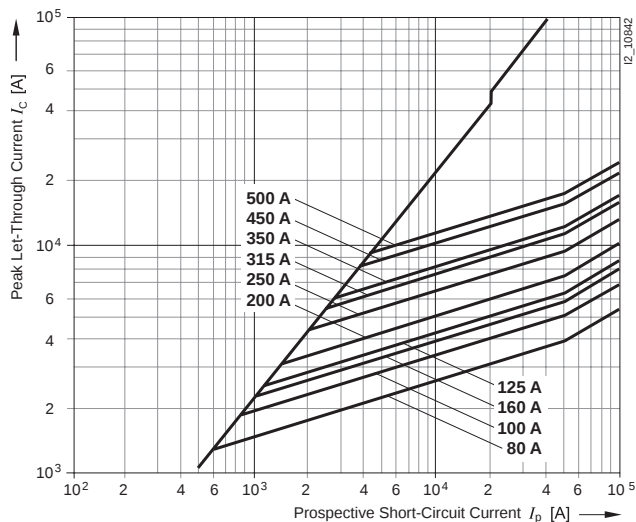

Correction factor k_A for breaking I^2t value

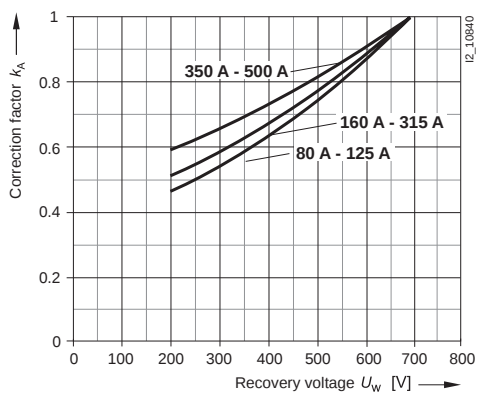

Peak arc voltage

