

Semiconductor Fuses

LV HRC SITOR Fuse Links


Rated voltage 2500 V AC

Characteristic curves


Series 3NE9 63.

Size: 3
Operational class: aR
Rated voltage: 2500 V AC
Rated current: 400 ... 630 A


Time/current characteristics diagram

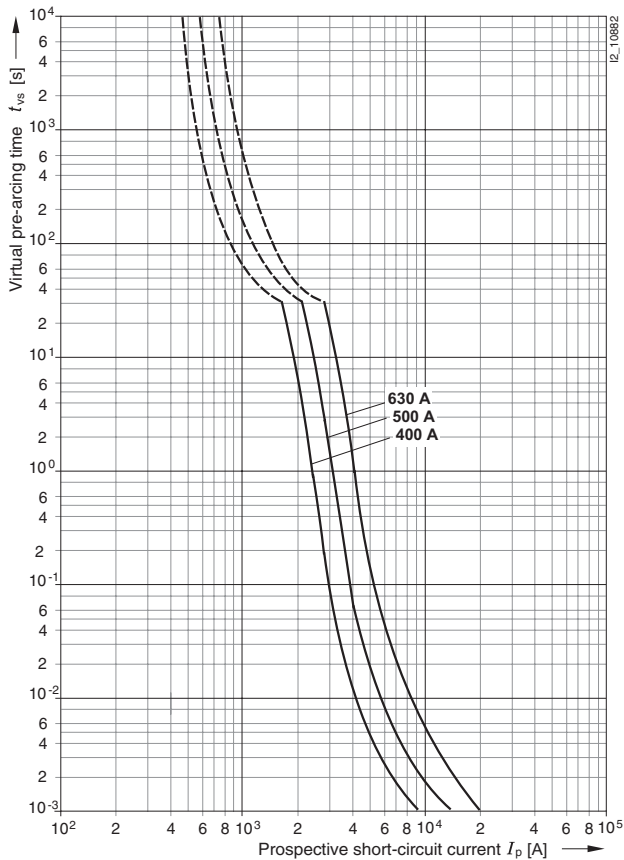

Let-through characteristics (current limitation at 50 Hz)

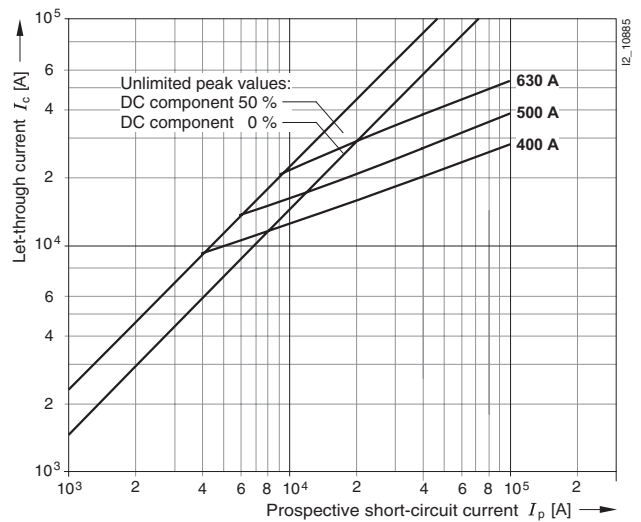

Correction factor k_A for breaking I^2t value

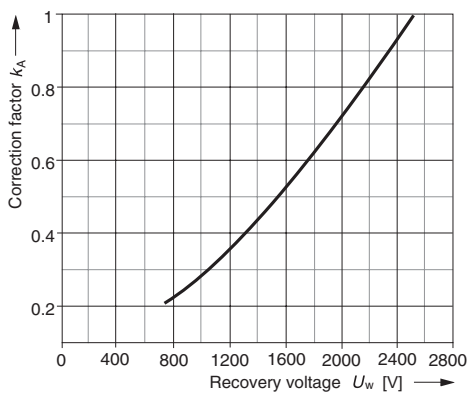

Peak arc voltage

