

Low-Voltage Fuse Systems

Fuse Links for Motor Circuits

Cylindrical fuse links aM

Characteristic curves

Series 3NW8


Size: 10 mm × 38 mm
 14 mm × 51 mm
 22 mm × 58 mm

Operational class: aM


Rated voltage: 500 V AC
 400 V AC (3NW8 120-1, 3NW8 230-1)

Rated current: 0.5 ... 100 A


Time/current characteristics diagram

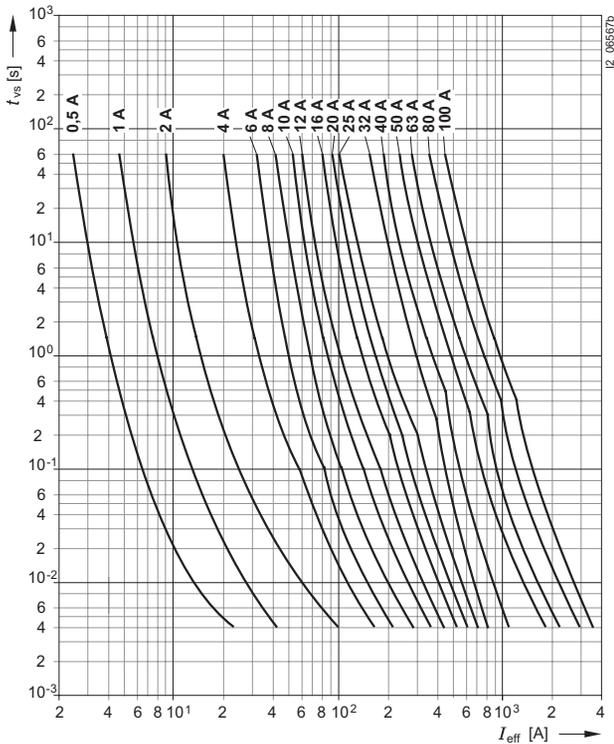

Melting $I^2 t_s$ values diagram

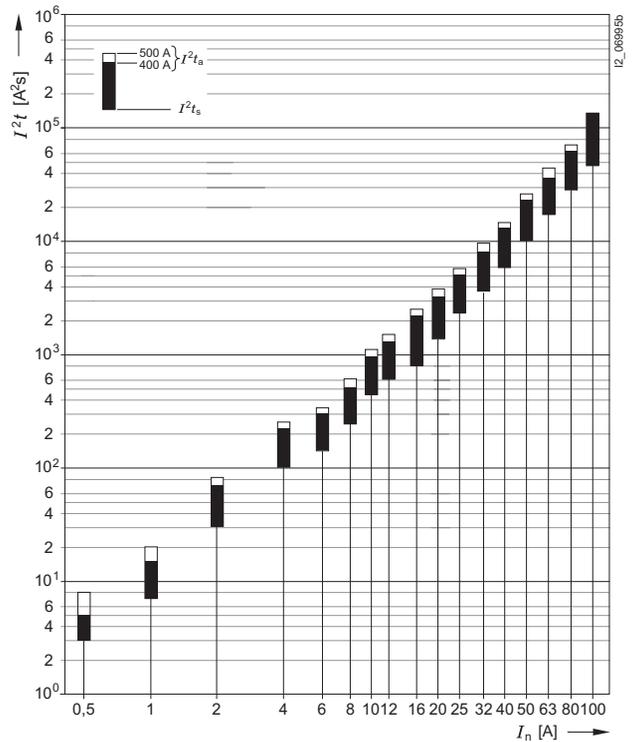

Current limitation diagram

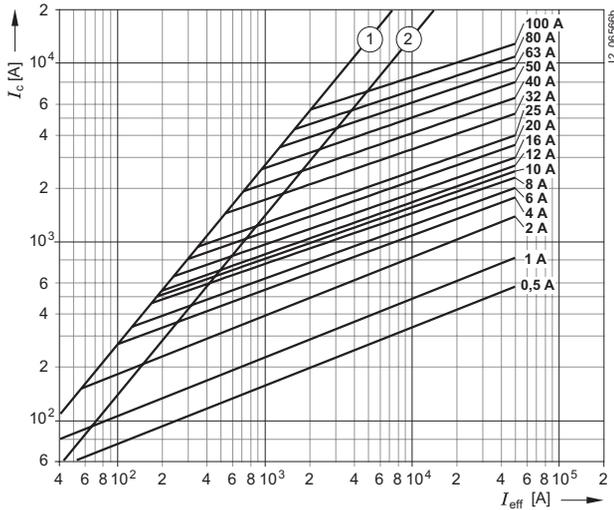

- ① Peak short-circuit current with largest DC component
- ② Peak short-circuit current without DC component

Table see page 1/137.