

3RT, 3TB, 3TF Contactors for Switching Motors

3TF2 contactors, 3-pole, 2.2 ... 4 kW

Technical specifications

Contactor Type **3TF2**


Endurance of the auxiliary contacts

The contact endurance for utilization category AC-12 or AC-15/AC-14 depends mainly on the breaking current. It is assumed that the operating mechanisms are switched randomly, i.e. not synchronized with the phase angle of the supply system.

Legend:

I_a = Breaking current

I_e = Rated operational current

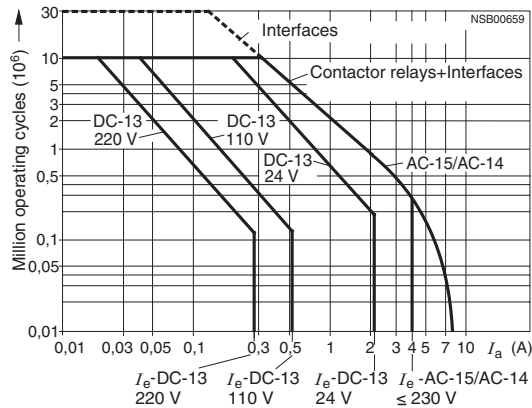

3TF2

Endurance of the main contacts

The characteristic curves show the contact endurance of the contactors when switching inductive AC loads (AC-3) depending on the breaking current and rated operational voltage. It is assumed that the operating mechanisms are switched randomly, i.e. not synchronized with the phase angle of the supply system.

The rated operational current I_e complies with utilization category AC-4 (breaking six times the rated operational current) and is intended for a contact endurance of at least 200 000 operating cycles. If a shorter endurance is sufficient, the rated operational current I_e /AC-4 can be increased.

If the contacts are used for mixed operation, i.e. if normal switching (breaking the rated operational current according to utilization category AC-3) in combination with intermittent inching (breaking several times the rated operational current according to utilization category AC-4), the contact endurance can be calculated approximately from the following equation:

$$X = \frac{A}{1 + \frac{C}{100} \left(\frac{A}{B} - 1 \right)}$$

Characters in the equation:

X = Contact endurance for mixed operation in operating cycles

A = Contact endurance for normal operation ($I_a = I_e$) in operating cycles

B = Contact endurance for inching

(I_a = multiple of I_e) in operating cycles

C = Inching operations as a percentage of total switching operations

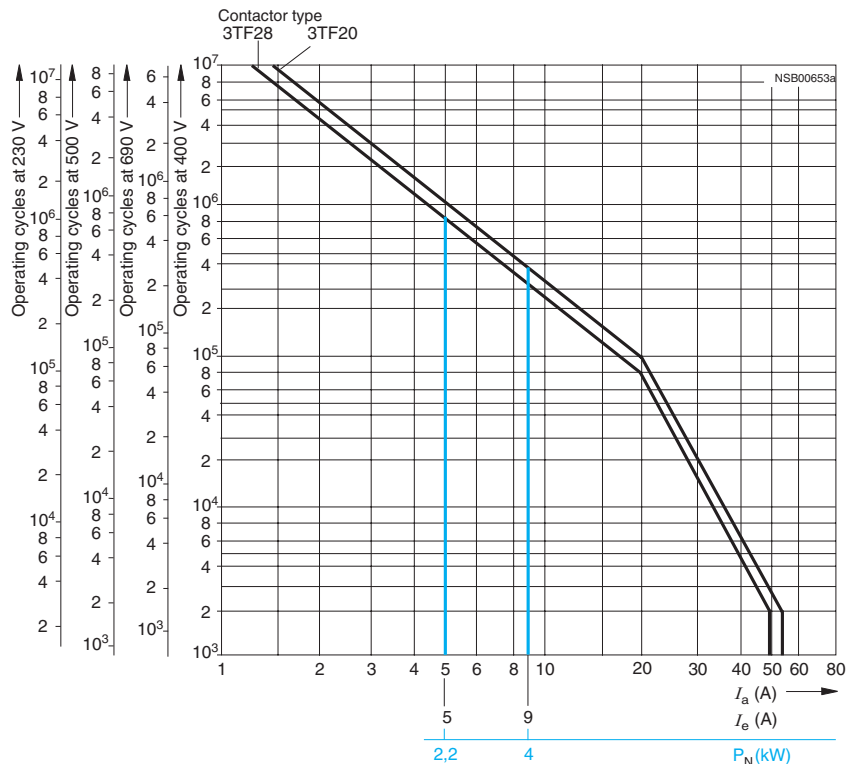


Diagram legend:

P_N = Rated power for squirrel-cage motors at 400 V

I_a = Breaking current

I_e = Rated operational current

3RT, 3TB, 3TF Contactors for Switching Motors

3TF2 contactors, 3-pole, 2.2 ... 4 kW

Contactor	Type		3TF20/3TF28	3TF22/3TF29
General data				
Permissible mounting position	AC and DC operation		any	
Mechanical endurance	AC operation	Operating cycles	10 million	
	DC operation		30 million	
	Auxiliary switch block		10 million	
Rated insulation voltage U_i (degree of pollution 3)				
• Screw terminal		V	690	690 ¹⁾
• Flat connector 6.3 mm x 0.8 mm		V	500	--
• Solder pin connection		V	500	--
Rated impulse withstand voltage U_{imp} (degree of pollution 3)				
• Screw terminal		kV	8	8 ²⁾
• Flat connector 6.3 mm x 0.8 mm		kV	6	--
• Solder pin connection		kV	6	--
Safe isolation between coil and main contacts (according to DIN VDE 0106 Part 101 and A1 [draft 2/89])		V	Up to 300	
Mirror contacts				
A mirror contact is an auxiliary NC contact that cannot be closed simultaneously with a NO main contact.			Yes, this applies to both the basic unit as well as to between the basic unit and the mounted auxiliary switch block according to EN 60947-4-1, Appendix F	Yes, according to EN 60947-4-1 Appendix F SUVA
Permissible ambient temperature ³⁾	During operation	°C	-25 ... +55	
	During storage	°C	-55 ... +80	
Degree of protection according to EN 60947-1 Appendix C			IP00 open IP20 for screw terminal IP40 coil assembly	
Touch protection according to EN 50274			Finger-safe for screw terminal	
Shock resistance				
Without 3TX44 auxiliary switch block				
Rectangular pulse	AC operation	g/ms	8.3/5 and 5.2/10	--
	DC operation	g/ms	11.3/5 and 9.2/10	--
Sine pulse	AC operation	g/ms	13/5 and 8/10	--
	DC operation	g/ms	17.4/5 and 12.9/10	--
With 3TX44 auxiliary switch block				
Rectangular pulse	AC operation	g/ms	5/5 and 3.6/10	5/5 and 3.6/10
	DC operation	g/ms	9/5 and 6.9/10	9/5 and 7.3/10
Sine pulse	AC operation	g/ms	7.8/5 and 5.6/10	7.8/5 and 5.6/10
	DC operation	g/ms	13.9/5 and 10.1/10	14/5 and 11/10
Conductor cross-sections			4)	
Short-circuit protection for contactors without overload relays				
Main circuit ⁵⁾				
• Fuse links gL/gG LV HRC 3NA, DIAZED 5SB, NEOZED 5SE				
- According to IEC 60947-4/ DIN VDE 0660, Part 2	Type of coordination "1":	A	25	
	Type of coordination "2" ⁶⁾	A	10	
	Weld-free	A	10	
• Miniature circuit breaker with C characteristic		A	10	
Auxiliary circuit				
Short-circuit current $I_k \geq 1$ kA				
• Fuse links gL/gG DIAZED 5SB, NEOZED 5SE		A	6	

1) Auxiliary contacts 500 V.
2) Auxiliary contacts 6 kV.
3) Applies to 50/60 Hz coil:
At 50 Hz, $1.1 \times U_{S,}$, side-by-side mounting and 100 % ON period the max. ambient temperature is +40 °C.
4) See conductor cross-sections.

5) According to excerpt from IEC 60947-4/DIN VDE 0660 Part 102
Type of coordination "1":
Destruction of the contactor and the overload relay is permissible.
The contactor and/or overload relay can be replaced if necessary.
Type of coordination "2":
The overload relay must not suffer any damage. Contact welding on the contactor is permissible, however, if the contacts can be easily separated.
6) A short-circuit current of $I_q \leq 6$ kA applies to type of coordination "2".

3RT, 3TB, 3TF Contactors for Switching Motors

3TF2 contactors, 3-pole, 2.2 ... 4 kW

Contactor	Type		3TF2
Control			
Magnetic coil operating range¹⁾			0.8 ... 1.1 x U_s
Power consumption of the magnetic coils (when coil is cold and 1.0 x U_s)			
Standard version			
AC operation, 50 Hz	Closing	VA	15
	• P.f.		0.41
	Closed	VA	6.8
AC operation, 60 Hz	• P.f.		0.42
	Closing	VA	14.4
	• P.f.		0.36
AC operation, 50/60 Hz ¹⁾	Closed	VA	6.1
	• P.f.		0.46
	Closing	VA	16.5/13.2
For USA and Canada	• P.f.		0.43/0.38
	Closed	VA	8.0/5.4
	• P.f.		0.48/0.42
AC operation, 50 Hz	Closing	VA	14.6
	• P.f.		0.38
	Closed	VA	6.5
AC operation, 60 Hz	• P.f.		0.40
	Closing	VA	14.4
	• P.f.		0.30
DC operation	Closed	VA	6.0
	• P.f.		0.44
	Closing = Closed	W	3
Permissible residual current of the electronic circuit²⁾ (for 0 signal)			
	AC operation	mA	$\leq 3 \times (230 \text{ V}/U_s)$
	DC operation	mA	$\leq 1 \times (230 \text{ V}/U_s)$
Operating times at 0.8 ... 1.1 x U_s³⁾			
Total break time = Opening delay + Arcing time			
Values apply with coil in cold state and at operating temperature for operating range			
• AC operation	Closing delay	ms	5 ... 19
	Opening delay	ms	2 ... 22
Dead interval			
• DC operation	Closing delay	ms	16 ... 65
	Opening delay	ms	2 ... 5
Arcing time			
		ms	10 ... 15
Operating times at 1.0 x U_s³⁾			
• AC operation	Closing delay	ms	5 ... 18
	Opening delay	ms	3 ... 21
Dead interval			
• DC operation	Closing delay	ms	19 ... 31
	Opening delay	ms	3 ... 4
Arcing time			
		ms	10 ... 15

¹⁾ Applies to 50/60 Hz coil:
At 50 Hz, 1.1 x U_s , side-by-side mounting and 100 % ON period the max. ambient temperature is +40 °C.

²⁾ The 3TX4 490-1J additional load module is recommended for higher residual currents (see Accessories and Spare Parts).

³⁾ The OFF-delay of the NO contact and the ON-delay of the NC contact are increased if the contactor coils are attenuated against voltage peaks (noise suppression diode 6 to 10 times; diode assemblies 2 to 6 times, varistor +2 to 5 ms).

3RT, 3TB, 3TF Contactors for Switching Motors

3TF2 contactors, 3-pole, 2.2 ... 4 kW

Contactor	Type		3TF28 3TF29	3TF20 ...-0..., 3TF22 ...-0...	3TF20 ...-3..., 3TF20 ...-6..., 3TF20 ...-7... S00
	Size		S00	S00	S00
Main circuit					
AC capacity					
Utilization category AC-1 Switching resistive loads					
Rated operational current I_e (at 40 °C)	up to 400/380 V	A	18	18	18
	690/660 V	A	18	18	--
Rated operational current I_e (at 55 °C)	400/380 V	A	16	16	16
	690/660 V	A	16	16	--
Rated power of AC loads P.f. = 1	at 230/220 V	kW	6.0	6.0	6.0
	400/380 V	kW	10	10	10
	500 V	kW	13	13	13
	690/660 V	kW	17	17	--
Minimum conductor cross-section for loads with I_e		mm ²	2.5	2.5	2.5
Utilization category AC-2 and AC-3					
Rated operational current I_e	up to 220 V	A	5.1	9.0	9.0
	230 V	A	5.1	9.0	9.0
	380 V	A	5.1	9.0	9.0
	400 V	A	5.1	8.4	8.4
	500 V	A	4.8	6.5	6.5
	660 V	A	4.8	5.2	--
	690 V	A	4.8	5.2	--
Rated power for motors with slipring or squirrel cage at 50 and 60 Hz and	at 110 V	kW	0.7	1.2	1.2
	115 V	kW	0.7	1.2	1.2
	120 V	kW	0.7	1.3	1.3
	127 V	kW	0.8	1.4	1.4
	200 V	kW	1.2	2.2	2.2
	220 V	kW	1.3	2.4	2.4
	230 V	kW	1.4	2.5	2.5
	240 V	kW	1.5	2.6	2.6
	380 V	kW	2.2	4.0	4.0
	400 V	kW	2.2	4.0	4.0
	415 V	kW	2.5	4.0	4.0
	440 V	kW	2.5	4.0	4.0
	460 V	kW	2.7	4.0	4.0
	500 V	kW	2.9	4.0	4.0
	575 V	kW	3.2	4.0	--
	660 V	kW	3.8	4.0	--
	690 V	kW	4.0	4.0	--
Utilization category AC-4 (Contact endurance approx. 200 000 operating cycles at $I_a = 6 \times I_e$)					
Rated operational current I_e	up to 400 V	A	1.9	2.6	2.6
	690 V	A	1.4	1.8	--
Rated power for motors with squirrel cage at 50 and 60 Hz and	at 110 V	kW	0.23	0.32	0.32
	115 V	kW	0.24	0.33	0.33
	120 V	kW	0.26	0.35	0.35
Max. permissible rated operational current I_e /AC-4 $\cong I_e$ /AC-3 up to 500 V, for reduced contact endurance and reduced switching frequency	127 V	kW	0.27	0.37	0.37
	200 V	kW	0.42	0.58	0.58
	220 V	kW	0.47	0.64	0.64
	230 V	kW	0.49	0.67	0.67
	240 V	kW	0.51	0.70	0.70
	380 V	kW	0.81	1.10	1.10
	400 V	kW	0.85	1.15	1.15
	415 V	kW	0.93	1.20	1.20
	440 V	kW	1.0	1.27	1.27
	460 V	kW	1.0	1.33	1.33
	500 V	kW	1.1	1.45	1.45
	575 V	kW	1.0	1.30	--
	660 V	kW	0.86	1.10	--
	690 V	kW	0.89	1.15	--

3RT, 3TB, 3TF Contactors for Switching Motors

3TF2 contactors, 3-pole, 2.2 ... 4 kW

Contactor	Type		3TF28 3TF29	3TF20 ...-0..., 3TF22 ...-0...	3TF20 ...-3..., 3TF20 ...-6..., 3TF20 ...-7... S00		
	Size		S00	S00	S00		
Main circuit							
AC capacity							
Utilization category AC-5a Switching gas discharge lamps Per main current path at 230/220 V							
Rated power per lamp	Rated operational current per lamp (A)						
Uncorrected							
L 18 W	0.37	Units	43				
L 36 W	0.43	Units	37				
L 58 W	0.67	Units	23				
Lead-lag circuit							
L 18 W	0.11	Units	144				
L 36 W	0.21	Units	76				
L 58 W	0.32	Units	50				
Switching gas discharge lamps with correction, solid-state ballast Per main current path at 230/220 V							
Rated power per lamp	Capacitance (µF)	Rated operational current per lamp (A)					
Parallel correction							
L 18 W	4.5	0.11	Units	22			
L 36 W	4.5	0.21	Units	22			
L 58 W	7	0.31	Units	14			
With solid-state ballast (single lamp)							
L 18 W	6.8	0.10	Units	63			
L 36 W	6.8	0.18	Units	35			
L 58 W	10	0.27	Units	23			
With solid-state ballast (two lamps)							
L 18 W	10	0.18	Units	35			
L 36 W	10	0.35	Units	18			
L 58 W	22	0.52	Units	12			
Utilization category AC-5b, switching incandescent lamps		kW	1.6		--		
Per main current path at 230/220 V							
Utilization category AC-6a, switching AC transformers							
Rated operational current I _e							
• For inrush current n = 20			at 400 V	A	2.9	5.1	5.1
• For inrush current n = 30			at 400 V	A	1.9	3.3	3.3
Rated power P							
• For inrush current n = 20			up to 230/220 V	kVA	1.14	2.0	2.0
			400/380 V	kVA	2	3.5	3.5
			500 V	kVA	4.1	4.6	4.6
			690/660 V	kVA	5.4	6.0	--
• For inrush current n = 30			up to 230/220 V	kVA	0.74	1.3	1.3
			400/380 V	kVA	1.3	2.3	2.3
			500 V	kVA	2.8	3.1	3.1
			690/660 V	kVA	3.6	4.0	--
For deviating inrush current factors x, the power must be recalculated as follows: P _x = P _{n30} x (30/x)							
Utilization category AC-6b Switching low-inductance (low-loss, metallized dielectric) AC capacitors			No switching capacity				
Utilization category AC-7a Switching low inductive loads in household appliances							
Rated operational current I _e (at 55 °C)			at 400/380 V	A	16	16	16
			690/660 V	A	16	16	--
Rated power at 50 and 60 Hz			at 230/220 V	kW	6	6	6
			400/380 V	kW	10	10	10
Minimum conductor cross-section for loads with I _e				mm ²	2.5	2.5	2.5
Utilization category AC-7b Switching motor loads in household appliances							
Rated operational current I _e			up to 220 V	A	5.1	9.0	9.0
			230 V	A	5.1	9.0	9.0
			380 V	A	5.1	9.0	9.0
			400 V	A	5.1	8.4	8.4
Rated power of motors at 50 and 60 Hz and			at 110 V	kW	0.68	1.2	1.2
			220 V	kW	1.3	2.4	2.4
			230 V	kW	1.4	2.5	2.5
			240 V	kW	1.5	2.6	2.6
			380 V	kW	2.2	4.0	4.0
			400 V	kW	2.4	4.0	4.0

3RT, 3TB, 3TF Contactors for Switching Motors

3TF2 contactors, 3-pole, 2.2 ... 4 kW

Contactor	Type		3TF28 3TF29	3TF20 ...-0..., 3TF22 ...-0...	3TF20 ...-3..., 3TF20 ...-6..., 3TF20 ...-7... S00
	Size		S00	S00	S00
Main circuit					
Load rating with DC					
Utilization category DC-1 Switching resistive loads (contact endurance 0.1 x 10 ⁶ operating cycles; <i>L/R</i> ≤ 1 ms) Rated operational current <i>I</i> _e (at 55 °C)					
• 1 conducting path	up to 24 V 60 V 110 V 220/240 V	A A A A	10 4 1.5 0.6	16 6 2 1	16 6 2 1
• 2 conducting paths in series	up to 24 V 60 V 110 V 220/240 V	A A A A	10 10 4 1.5	16 16 6 2	16 16 6 2
• 3 conducting paths in series	up to 24 V 60 V 110 V 220/240 V	A A A A	10 10 10 4	16 16 16 6	16 16 16 6
Utilization category DC-3 and DC-5 Shunt-wound and series-wound motors (<i>L/R</i> ≤ 15 ms) Rated operational current <i>I</i> _e (at 55 °C)					
• 1 conducting path	up to 24 V 60 V 110 V 220/240 V	A A A A	4 1.8 0.3 --	6 3 0.5 0.1	6 3 0.5 0.1
• 2 conducting paths in series	up to 24 V 60 V 110 V 220/240 V	A A A A	6 3 1.5 0.3	10 5 2 0.5	10 5 2 0.5
• 3 conducting paths in series	up to 24 V 60 V 110 V 220/240 V	A A A A	10 10 10 1.5	16 16 16 2	16 16 16 2
Thermal load capacity		10 s current A	70		
Power loss per conducting path		at <i>I</i> _e /AC-3 W	0.3		
Switching frequency					
Switching frequency <i>z</i> in operating cycles/hour					
• Contactors without overload relays	No-load switching frequency	h ⁻¹	10000		
Dependence of the switching frequency <i>z</i> ' on the operational current <i>I</i> ' and operational voltage <i>U</i> ': <i>z</i> ' = <i>z</i> x (<i>I</i> _e / <i>I</i> ') x (400 V/ <i>U</i> ') ^{1.5} 1/h	AC-1	h ⁻¹	1000		
	AC-2	h ⁻¹	500		
	AC-3	h ⁻¹	1000		
• Contactors with overload relays (mean value)		h ⁻¹	15		
Conductor cross-sections					
Screw terminals		Main and auxiliary conductors			
	Solid	mm ²	2 x (0.5 ... 2.5), 1 x 4 2 x (20 ... 14) AWG, 1 x 12 AWG		
	Finely stranded with end sleeve	mm ²	2 x (0.5 ... 1.5), 1 x 2.5		
	Pin-end connector (DIN 46231)	mm ²	1 x 1 ... 2.5		
Prescribed tightening torque for terminal screws	Terminal screw	Nm	M3 0.8 ... 1.3 (7 ... 11lb.in)		
Flat connectors					
When using a plug-in sleeve	6.3 ... 1	mm ²	0.5 ... 1		
Finely stranded	6.3 ... 2.5	mm ²	1 ... 2.5		
Solder pin connection			Only for printed circuit boards		

3RT, 3TB, 3TF Contactors for Switching Motors

3TF2 contactors, 3-pole, 2.2 ... 4 kW

Contactor	Type		3TF20 ..-0...	3TF20 ..-3..., 3TF20 ..-6..., 3TF20 ..-7...
	Size		S00	S00
Ⓒ and Ⓜ rated data of the 3TF20 contactors				
Rated insulation voltage U_i		V AC	600	300
Uninterrupted current	Open and enclosed	A	16	16 (10 for solder pin connection)
Maximum horsepower ratings (Ⓒ and Ⓜ approved values)				
Rated power for induction motors with 60 Hz				
1-phase	at 115 V	hp	0.5	--
	200 V	hp	1	1
	230 V	hp	1.5	1
	460/575 V	hp	--	--
3-phase	at 115 V	hp	--	--
	200 V	hp	3	3 (1 for 3TF20 ..-6)
	230 V	hp	3	3 (1 for 3TF20 ..-6)
	460/575 V	hp	5	--
Overload relays	Type/Setting range		3UA7/EB 8 ... 10 A	

Contactor	Type		3TF2
	Size		
Rated data of the auxiliary contacts according to IEC 60947-5-1/ DIN VDE 0660 Part 200			
Rated insulation voltage U_i (degree of pollution 3)		V	690
Continuous thermal current I_{th} = Rated operational current I_e /AC-12		A	10
AC load Rated operational current I_e /AC-15/AC-14 for rated operational voltage U_e			
	24 V	A	4
	110 V	A	4
	125 V	A	4
	220 V	A	4
	230 V	A	4
	380 V	A	3
	400 V	A	3
	500 V	A	2
	660 V	A	1
	690 V	A	1
DC load Rated operational current I_e /DC-12 for rated operational voltage U_e			
	24 V	A	4
	48 V	A	2.2
	110 V	A	1.1
	125 V	A	1.1
	220 V	A	0.5
	440 V	A	--
	600 V	A	--
Rated operational current I_e /DC-13 for rated operational voltage U_e			
	24 V	A	2.1
	48 V	A	1.1
	110 V	A	0.52
	125 V	A	0.52
	220 V	A	0.27
	440 V	A	--
	600 V	A	--
Ⓒ, Ⓜ and Ⓜ rated data of the auxiliary contacts			
Rated voltage, max.		V AC	600
Auxiliary switch blocks, max.		V AC	300
Switching capacity			A 600, Q 300
Uninterrupted current at 240 V AC		A	10