

3RA Fuseless Load Feeders



Direct-On-Line Starters, Reversing Starters, Accessories and Infeed System

Project planning aids

3RV19 infeed system

3-phase busbars with infeed



For 2 motor starter protectors size S00 and S0, with expansion plug
3RV19 17-1. + 3RV19 17-5BA00

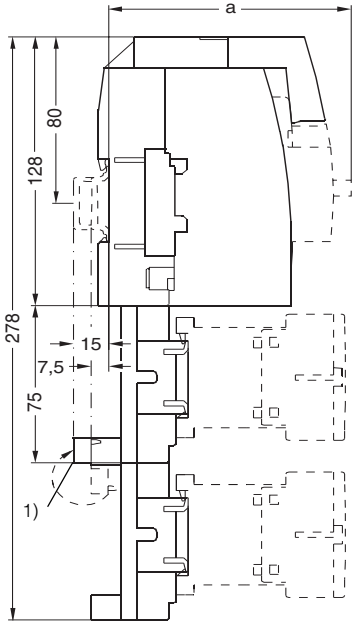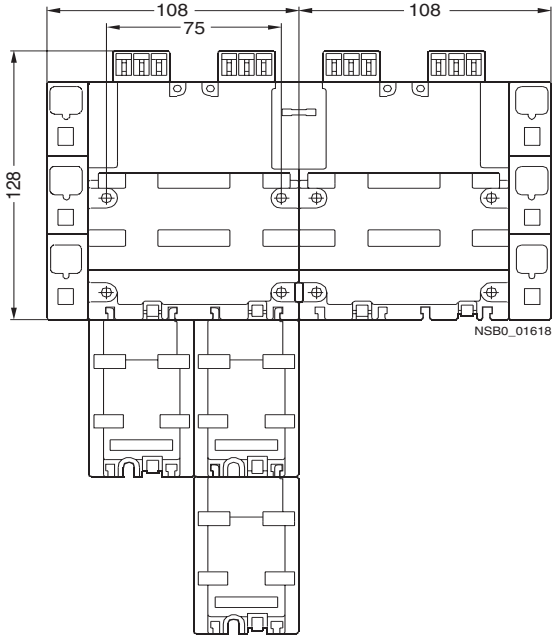

	S00	S0
a	104	125

3-phase busbars for system expansion

For 2 and 3 motor starter protectors size S00 and S0 with extra-wide expansion plug
3RV19 17-4. + 3RV19 17-5E and terminal block 3RV19 17-5D

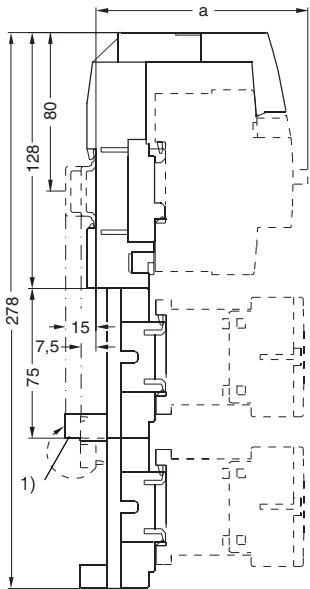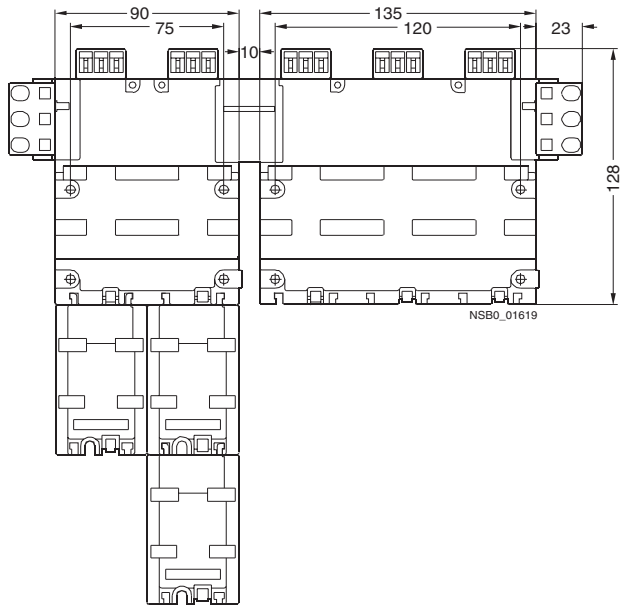

	S00	S0
a	104	125

1) Alternative mounting methods (see 3RV19 Infeed System, Design)

a)
One TH 35 standard mounting rail according to EN 60715
Depth: 7.5 mm
Spacer not used.

b)
One TH 35 standard mounting rail according to EN 60715
Depth: 15 mm
Spacer plugged into mating piece.