

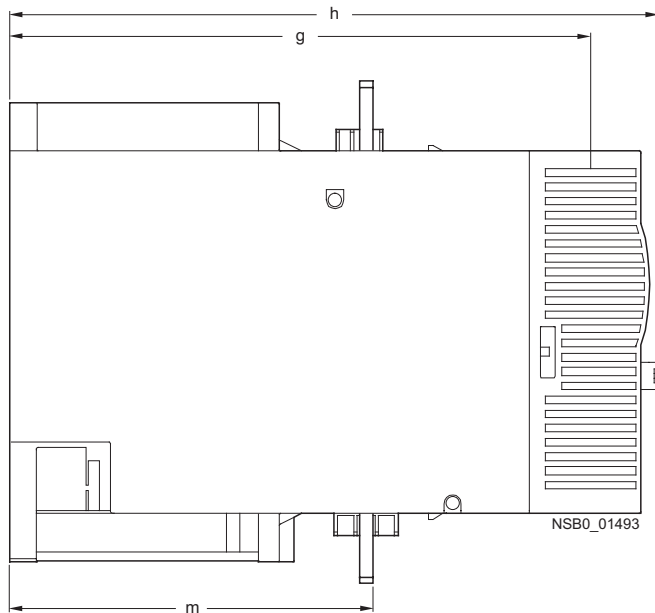


3RW44 2., 3RW44 3. and 3RW44 4. for high-feature applications

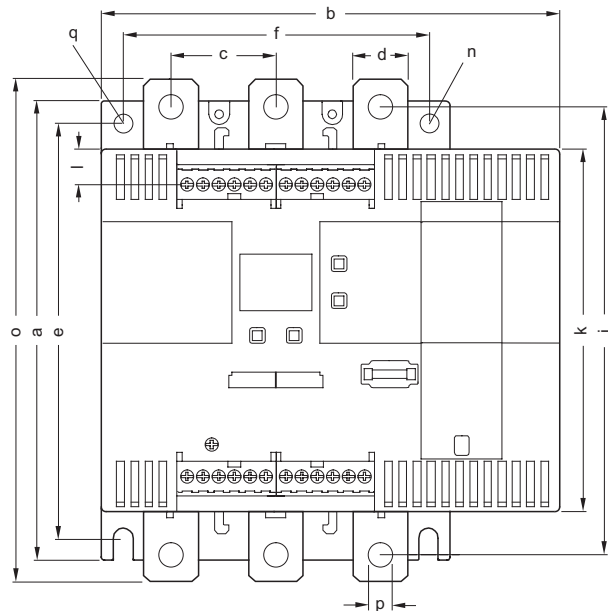

Type/Dimension (mm)	a	b	c	d	e	f	g	h	l	k	l	m	N	o	p	q
3RW44 2.	180	170	37	11	167	100	240	270	180	148	7,5	153	7	184	6,6	M6, 10 Nm
3RW44 3.	180	170	37	17	167	100	240	270	180	148	7,5	153	7	198	9	M6, 10 Nm
3RW44 4.	210	210	48	25	190	140	269	298	205	166	16	166	9	230	11	M8, 15 Nm

3RW44 5. for high-feature applications

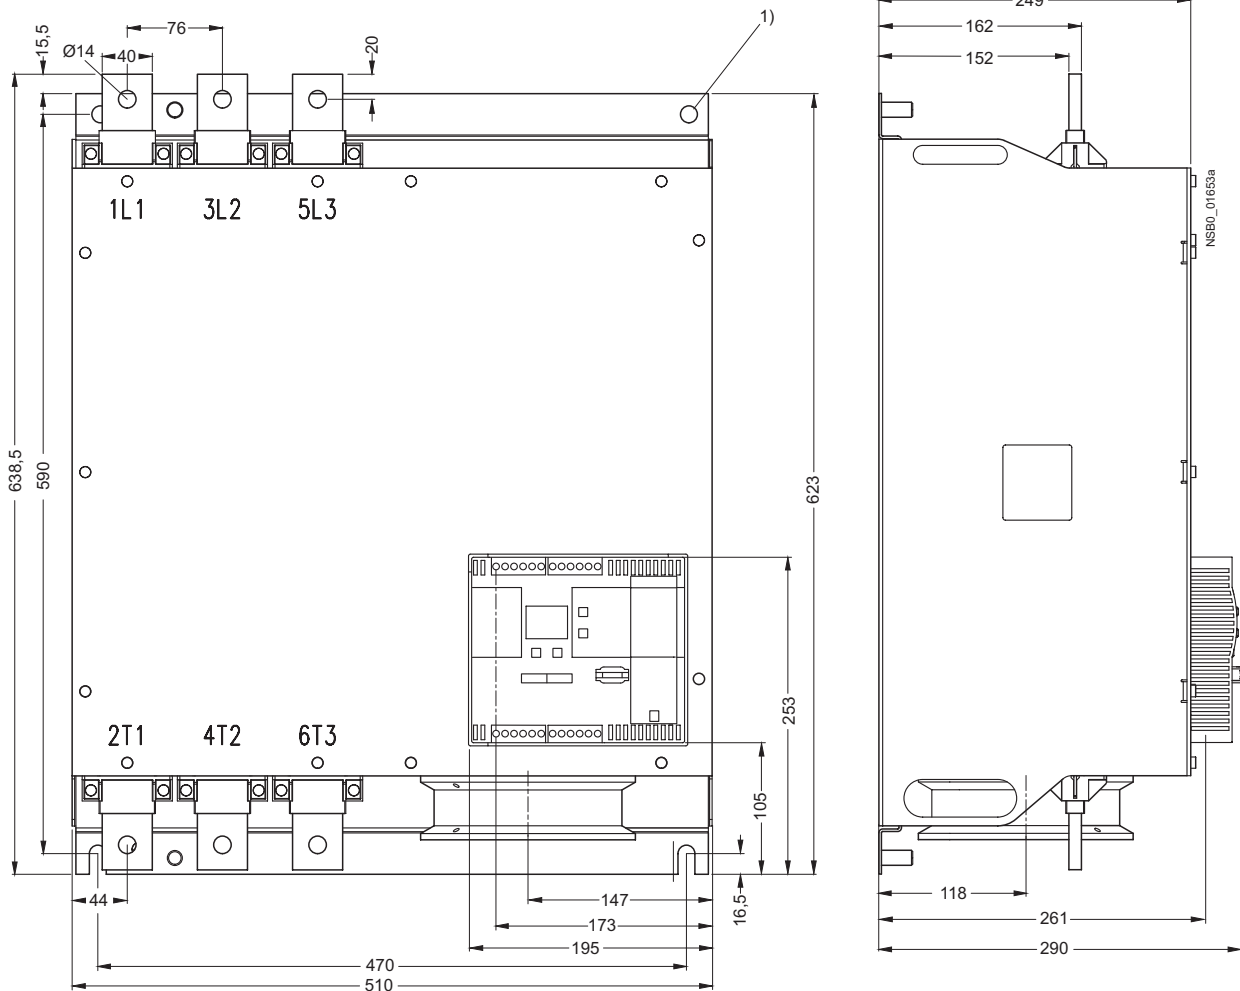

1) For M12 screw, tightening torque max. 35 Nm (310 lb.in.).