SIPART DR22 Controllers

6DR2210-.

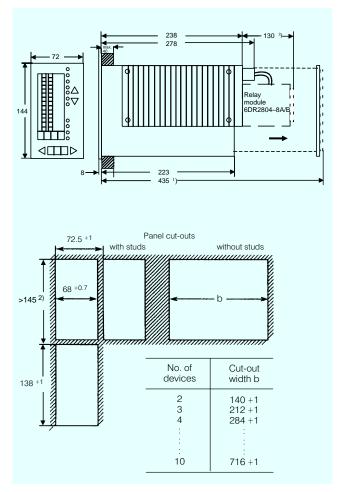


Fig. 1 SIPART DR22 controller and panel cut-outs, dimensions

¹⁾ Mounting depth required to enable replacement on the main circuit board.

²⁾ Mounting one above the other without interspacing is permissible if the permissible ambient temperature is observed.

³⁾ A relay module with 2 or 4 contacts (6DR2804-8A/-8B) can be snapped onto the rear of the controller; the mounting depth is then increased by 130 mm.