

Component	Valve manifold DN 5		Blow-out valves DN 8	
	Material	Mat. No.	Material	Mat. No.
Housing	C 22.8	1.0460	15 Mo 3	1.5415
Head parts	C 35	1.0501	21 CrMo V 57	1.7709
Spindles	X 12 CrMoS 17	1.4104	X 20 Cr 13	1.4021
Cone	X 35 CrMo 17	1.4122	X 35 CrMo 17	1.4122
	hardened and tempered		hardened and tempered	
Valve seats	X 6 CrNiMoTi 17 12 2	1.4571	X 20 Cr 13	1.4021
Packings	PTFE	–	Pure graphite	–
Welding pin	–	–	15 Mo 3	1.5415

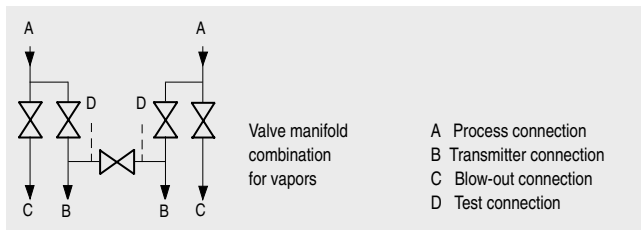


Fig. 1/94 Connections of the valve manifold combination DN 5/DN 8

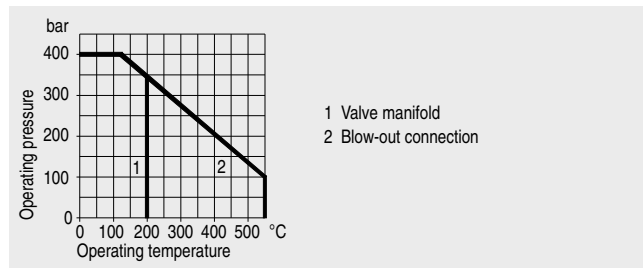


Fig. 1/95 Permissible operating pressure