

Fig. 1/102 Connections of the two-spindle, three-spindle and five-spindle valve manifolds

Further acceptance conditions by arrangement

Component	Valve manifold	
	Material	Mat. No.
Housing	X 2 CrNiMo 17 13 2	1.4404
Cone	X 6 CrNiMoTi 17 12 2	1.4571
Spindles	X 2 CrNiMo 18 10	1.4404
Head parts	X 5 CrNiMo 18 10	1.4401
Packings	PTFE	–

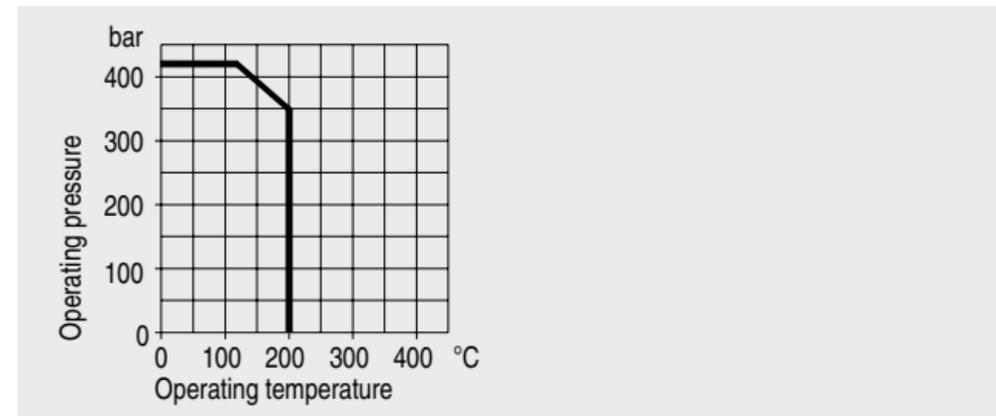


Fig. 1/103 Permissible operating pressure