

Connection		Dimensions of inserts			Weight
PVC adhesive bushing mm (inches)	Bushing female thread	With female thread	With PVC adhesive bushing		Approx. kg (lb)
d		A ± 4 mm (A ± 0.16 inch)	A ± 4 mm (A ± 0.16 inch)	B ± 4 mm (B ± 0.16 inch)	
20 (0.79)	G $\frac{1}{2}$	344 (13.54)	340 (13.39)		0.4 (0.88)
32 (1.26)	G1	353 (13.90)	352 (13.86)	306 (12.05)	0.7 (1.54)
63 (2.49)	G2	372 (14.65)	382 (15.04)		2.2 (4.85)

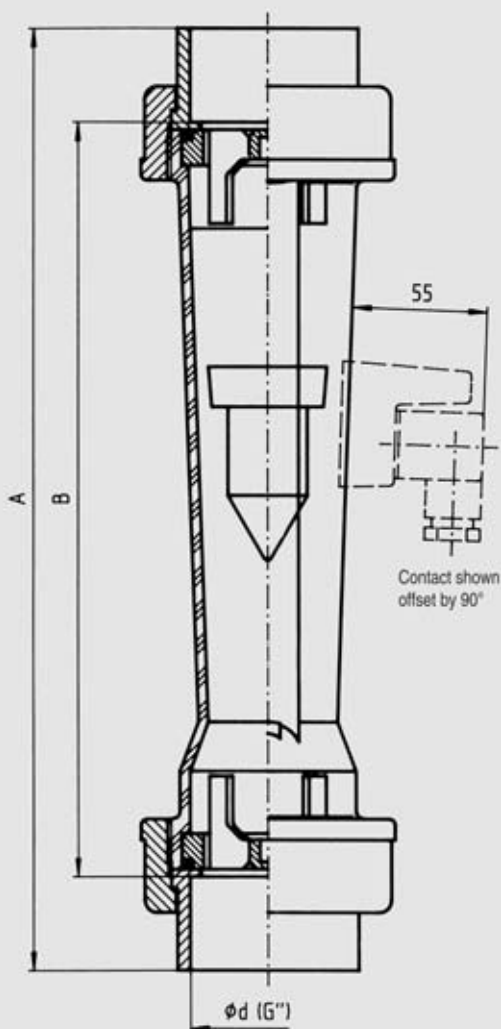


Fig. 3/81 SITRANS F VA Trogflux, dimensions